



GRADE 316 STAINLESS STEEL CENTRIFUGAL PUMPS

RSSC SERIES

Another REEFE pump of exceptional quality. High performing and heavy duty, these pumps are suitable for moving clean fresh water and clean saltwater.

APPLICATIONS


- Dairy Wash Down
- Water Transfer
- Hot Water Transfer
- Chemical Dosing
- Salt/Sea Water
- Hot Water Circulation
- Cooling Towers
- Heat Exchangers

FEATURES & BENEFITS

- Suitable for liquid temperatures from -20°C to +110°C (Pump Only)
- Continuous duty
- Corrosion resistant materials - Viton Seals and Orings

CONSTRUCTION

- Single phase motor
- Grade 316 stainless steel wet-end
- Thermal overload protection
- Mechanical seal: Graphite/Silicone-Carbide
- Viton seals
- Pump Control Options:
 - REEFE Pressure Controller*
 - REEFE Pressure Switch and Tank*
 - REEFE Variable Speed Control*
- Ingress Protection IP55
- Insulation Class F

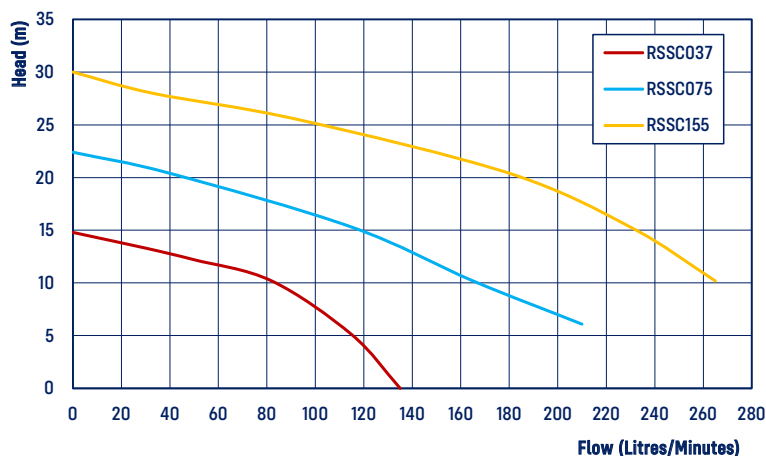

NOTE

*Components of Controllers NOT SUITABLE for saltwater applications or extreme temperature applications

CODE	MODEL	POWER 240V			RATED		MAXIMUM		SUCTION LIFT	INLET		OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
		AMPS	P1 (kW)	P2 (kW)	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)		MM	IN	MM	IN		
17159	RSSC037	2.4	0.55	0.37	65	11.5	135	14.8	No	32	1 ¼"	25	1"	7.5	330x190x240
30790	RSSC075	4.2	1.11	0.75	100	16.3	210	22.4	No	40	1 ½"	25	1"	10.3	360x245x280
17241	RSSC155	9.2	2.12	1.5	140	23	265	30	No	40	1 ½"	25	1"	19	420x260x295