

MULTISTAGE PRESSURE PUMP ONLY

RHMS SERIES



REEFE Multistage Pressure pumps are designed for reliable performance at high demands in domestic and commercial applications. A heavy duty, lightweight construction, yet installer friendly design guarantees easy installation. Quiet running and efficient pump for trouble free operation over an extended service life.

APPLICATIONS


- Amenities blocks, hotels, restaurants
- Whole house supply, apartment blocks
- Irrigation supply
- Stock watering systems

FEATURES & BENEFITS

- Quiet operation for minimal disturbance in application
- Lower power consumption for greater efficiency
- Max Water Temperature 35°C
- Supplied with 1.5m cable with Quick Plug for ease of installation

CONSTRUCTION

- Heavy duty 304 stainless steel housing
- In-built thermal overload protection on motor
- Brass barrel union
- Noryl/fibreglass diffusers
- Stainless steel impellers
- Ingress Protection IP44
- Insulation Class F

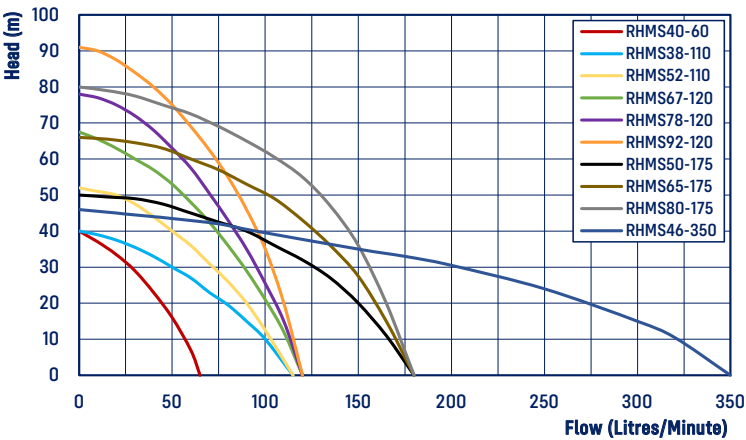

CODE	MODEL	POWER 240V			RATED		MAXIMUM		NO.OF TAPS	CABLE LENGTH (M)	INLET		OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
		AMPS	P1 (kW)	P2 (kW)	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)			MM	IN	MM	IN		
24010	RHMS40-60.T	3.5	0.79	0.6	25	30	60	40	2-4	1.5	25	1"	25	1"	6	357x126x160
24027	RHMS38-110.T	3.6	0.83	0.75	48	30	110	38	4-6	1.5	25	1"	25	1"	9.3	353x155x179
24034	RHMS52-110.T	5.4	1.24	0.8	48	40	110	52	5-8	1.5	25	1"	25	1"	9.8	372x155x179
24041	RHMS67-120.T	7.2	1.66	1.2	48	53	120	67	6-10	1.5	25	1"	25	1"	10.5	392x155x179
24942	RHMS78-120.T	7.8	1.79	1.2	48	62	120	78	6-10	1.5	25	1"	25	1"	11.2	410x155x179
24980	RHMS92-120.T	8.6	1.98	1.5	48	75	120	92	6-10	1.5	25	1"	25	1"	12.6	430x155x179
24058	RHMS50-175.T	8.9	2.05	1.1	88	40	180	50	8-14	1.5	32	1 ¼"	32	1 ¼"	12.7	436x191x212
24355	RHMS65-175.T	11.8	2.58	1.5	88	54	180	65	8-14	1.5	32	1 ¼"	32	1 ¼"	14.4	460x191x212
25024	RHMS80-175.T	11.8	2.58	1.5	88	54	180	65	8-14	1.5	32	1 ¼"	32	1 ¼"	15.85	485x191x212
24362	RHMS46-350.T	12	2.76	2.2	175	33	350	46	15-20	1.5	50	2"	40	1 ½"	16.5	500x193x212